

Multizone RF Single Color, 1 Channel Controller for Single Color Strips



Features


- With the ability to control up to 4 zones, you can control multiple setups with one remote.
- Wireless RF control, up to 30m in line of sight range.
- Power OFF Data Memory allows you to keep your saved settings, even after shutting off the controller.
- User Friendly set up and control.
- Compatible with LED amplifiers.
- Ability to control up to 4 zones per Transmitter Remote, and multiple Receiver RF Controllers per zone.

Product Specs

Model: RF-MZRX-1CH
Operating Voltage: DC 12V~24V
Max Current per Channel: 6A per Channel @ 12VDC, 3A per Channel @ 24VDC, 12A Total Output
Ambient Temperature: -20°C - 60°C (-4°F - 140°F)
Net Weight: 45g (1.59oz)
RF Control Distance: 30m (98.4 ft) in line of sight
IP Rating: IP40 (Keep dry at all times)
Dimensions: 84.95 x 45.05 x 22.32 mm (3.34 x 1.77 x 0.88 in)



Remote Key

Number	Key Name	Comment
1	Master ON	Turns ON all Receivers and Zones.
2	Master OFF	Turns OFF all Receivers and Zones.
3	Indicator Light	Indicates when a button is being pressed. This helps to know if remote has battery.
4	Master Brightness +	Increases the brightness for both CH.1 & CH.2 at once.
5	Master Brightness -	Decreases the brightness for both CH.1 & CH.2 at once.
6	Variable Dimmer 2	Allows you to lower the Var. 1 brightness and increase Var. 2 brightness.
7	Variable Dimmer 1	Allows you to lower the Var. 2 brightness and increase Var. 1 brightness.
8	Zones Selectors	Allows you to select which Zone to turn ON or OFF and to link/unlink zones.

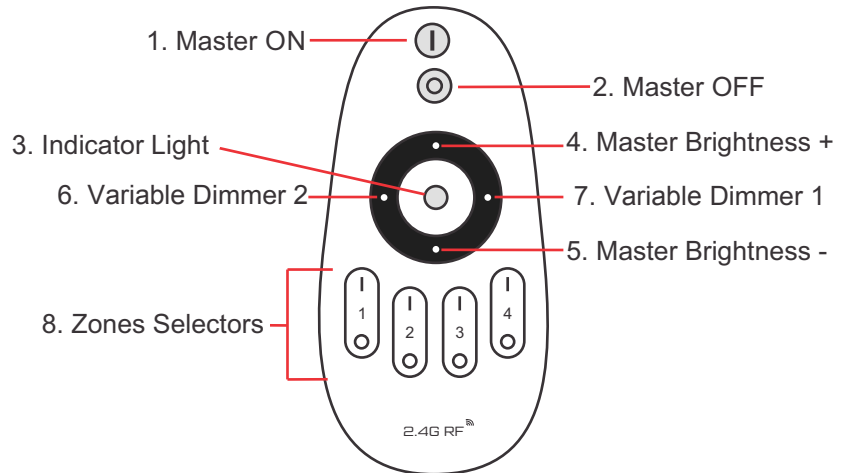

Note: Transmitter Remote sold separately. (Model: RF-MZTX-1CH)

Physical Layout

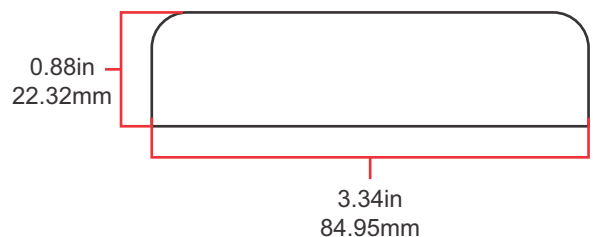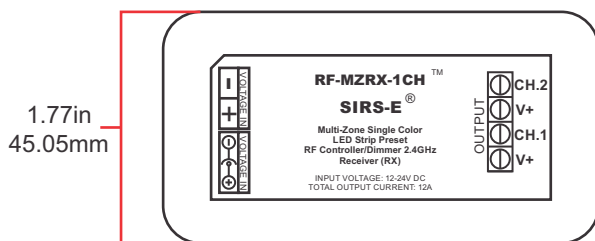

Last Revised on: 12/21/2016