

## LED Variable White Controller for Variable White Strips

### Features

- Dims Variable White LED Strips at preset or custom ranges from 1% to 100%.
- Wireless RF control, up to 30 meters in line of sight range.
- User friendly set up and control
- Compatible with **LED-AMP-12V** for unlimited amplification.

### Product Specs

**Model:** LED-CON-RF-VAR

**Operating Voltage:** DC 12V~24 V

**Max Current per Channel:** 6A @12VDC, 3A @ 24VDC

**Ambient Temperature:** -20°C – 60°C

**Net Weight:** 45 grams

**IP Rating:** IP40 (Non-waterproof, keep dry at all times)



### Remote Pairing

#### Matching Code

Press and Hold Key 3 for 3 seconds while powering on the controller.

If successful, light will blink 3 times when pairing is complete.

#### Clearing Code

Press Key 3 five times within 3 seconds while powering on the controller.

If successful, light will blink 6 times when clearing is complete.

### Remote Key

Key 1: on

Key 2: off




Key 3: Highest Brightness

Key 4: Medium Brightness

Key 5: Lowest Brightness

#### Intensity Control Wheel Use

Slide finger within Lowest to Highest Indicators for custom intensity results.

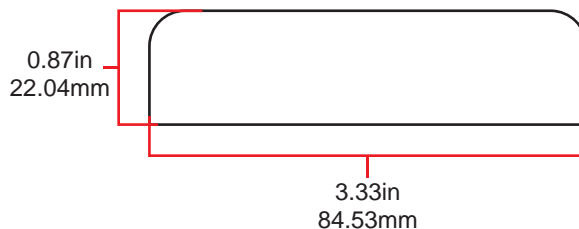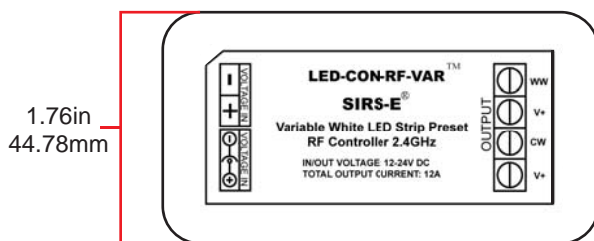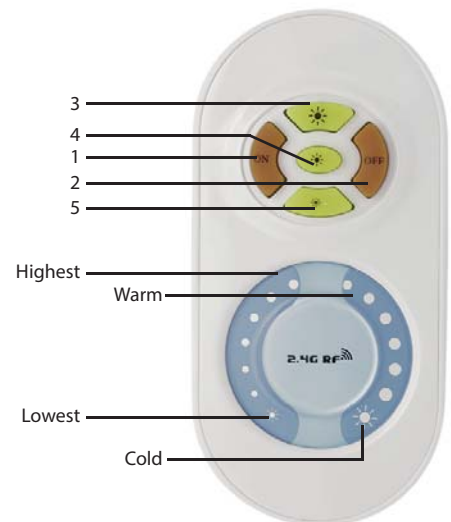

Last Revised 08/20/2015