


The SIRS-E® **SPI Digital** (SD) Led Strip Series utilizes integrated IC technology per LED to communicate and reproduce millions of colors. Create captivating effects that are limited only by the imagination of the user. The addition of the white LED allows you to dive deeper into more fine tuned control of your color choice.



The slim 10mm profile allows it to fit into various mounting channels for multiple lighting applications. Easily mountable utilizing 3M VHB Aero- Grade tape, engineered to dissipate heat.

The **SPI** series provides amazing results for all kinds of entertainment applications such as commercial, residential, productions, shows, and many more.

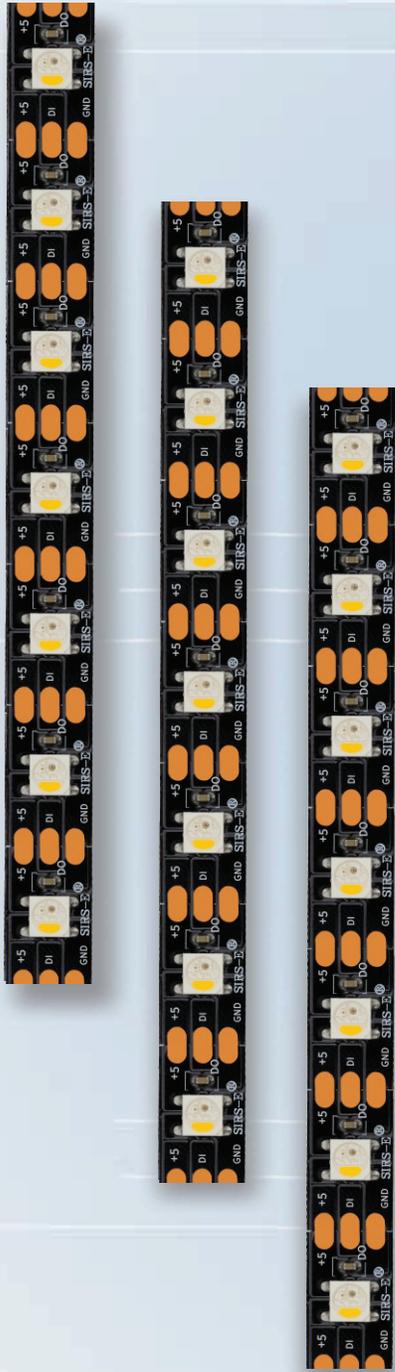

- **Digital RGBW LED Strip**
- **Cutable every pixel (16.5mm)** allowing for precise designs.
- **1 Pixel 1 LED**
- **Improved Digital LED density 60 LEDs/m**
- **Smooth transition dimming curves**
- **Higher refresh rate for cinematography.**
- **Pixel Mapping Order- GRBW**
- **Black PCB Board.**
- **White PCB Board (Special Order)**
- **IP 40 - Indoor, Dry / IP 68 - Damp, Wet**
- **5V DC Input Voltage**

Delivering superior strip lighting with a proven record spanning more than a decade without electrical, chromatic, LED or color rendering issues. SIRS-E® continues to lead the market place in stability, reliability, and efficiency of LED lighting and lighting control systems.

DIGITAL RGBW LED Strip

Customer Name Project Name Part Number



Description

SIRS-E® SPI 12V RGBW Digital LED strip, allows you to create billions of colors by simply mixing the Red, Green, Blue, and White colors and by having the ability to control each individual pixel and diode. Allowing the user to achieve an endless desire of design possibilities.
Comes in a Black PCB Board | White PCB Board (**Special Order**)

Product Specifications

Input Voltage	5 V DC	Cuttable Segment	Cuttable every pixel: 16.5mm / 0.65in
Control Method	1 Pixel 1 LED	Reel Length	16.4 ft / 5 m
Power Consumption	14 W/m / 4.27 W/ft	Max Run Length	16.4 ft / 5 m, powered from both sides
LED Chip Type	High Quality SMD 4-Diode RGBW	Board Width	0.39 in (10 mm)
LED Density	18 LEDs/ft / 60 LEDs/m	Luminous Flux Maintenance	75,000 hrs ¹
Channels/Pixels	4 Channels per Pixel (240 Channels/m)	IC	SK6812 - Pixel by Pixel
Board Type/Color	3 oz Density Copper, Black or White PCB	Environmental	IP 40 - Dry Locations / IP 68 - Damp, Wet
Operating Temperature	-10°F to 110°F	Warranty	5 Year Limited
Mounting	Non-Porous: 3M VHB Adhesive Tape	White Temperature	4200K
Pixel Mapping Order	GRBW		

Product Photometrics - Red, Green, and Blue Diodes

Color Diode	Peak Wavelength (nm)	Dominant Wavelength (nm)	CIE (x,y)	Luminous Flux (lm/ft)	Luminous Efficacy (lm/W)
Red	630	617.1	(0.6806, 0.3149)	N/A	17.96
Green	525	533.5	(0.2151, 0.6884)	N/A	59.87
Blue	462	470.6	(0.1510, 0.0976)	N/A	15.03

Product Photometrics - White Diode Only

Nominal CCT (K)	Luminous Flux (lm/ft)	Luminous Efficacy (lm/W)	CIE (x,y)	Duv ³	CRI	TM-30-15	
						Fidelity (Rf)	Gamut (Rg)
4386 K	195	113	(0.3653, 0.3685)	+0.0008	88	N/A	N/A

Product Photometrics - All Four Colors at Full Intensity

Nominal CCT (K)	Luminous Flux (lm/ft)	Luminous Efficacy (lm/W)	CIE (x,y)	Duv ³	CRI	TM-30-15	
						Fidelity (Rf)	Gamut (Rg)
5475 K	136	29.9	(0.3330, 0.3442)	+0.0013	94	N/A	N/A

1 - After 75,000 hrs: 30% Luminous Flux loss, 10% Chromaticity change, as per LM-80-15
2 - Photometric values estimated from our Digital Pix Series of LED strips

3 - Duv Chromaticity Consistency is throughout the run length. Typically below 1-step MacAdam Ellipse

Ordering Guide


Series	Voltage	Color	Density	IP	PCB Board Color
SPI	5	RGBWN	XX XX		X
			60 40		B
			68		W*

W* - White PCB board is made special order


Product Country of Origin

Product Engineering & Design	USA
Assembled	China Pre-assembled / USA Final Assembly
QC Quality Control	USA
Product Customization	USA
Technical Support	USA


Wiring Diagram

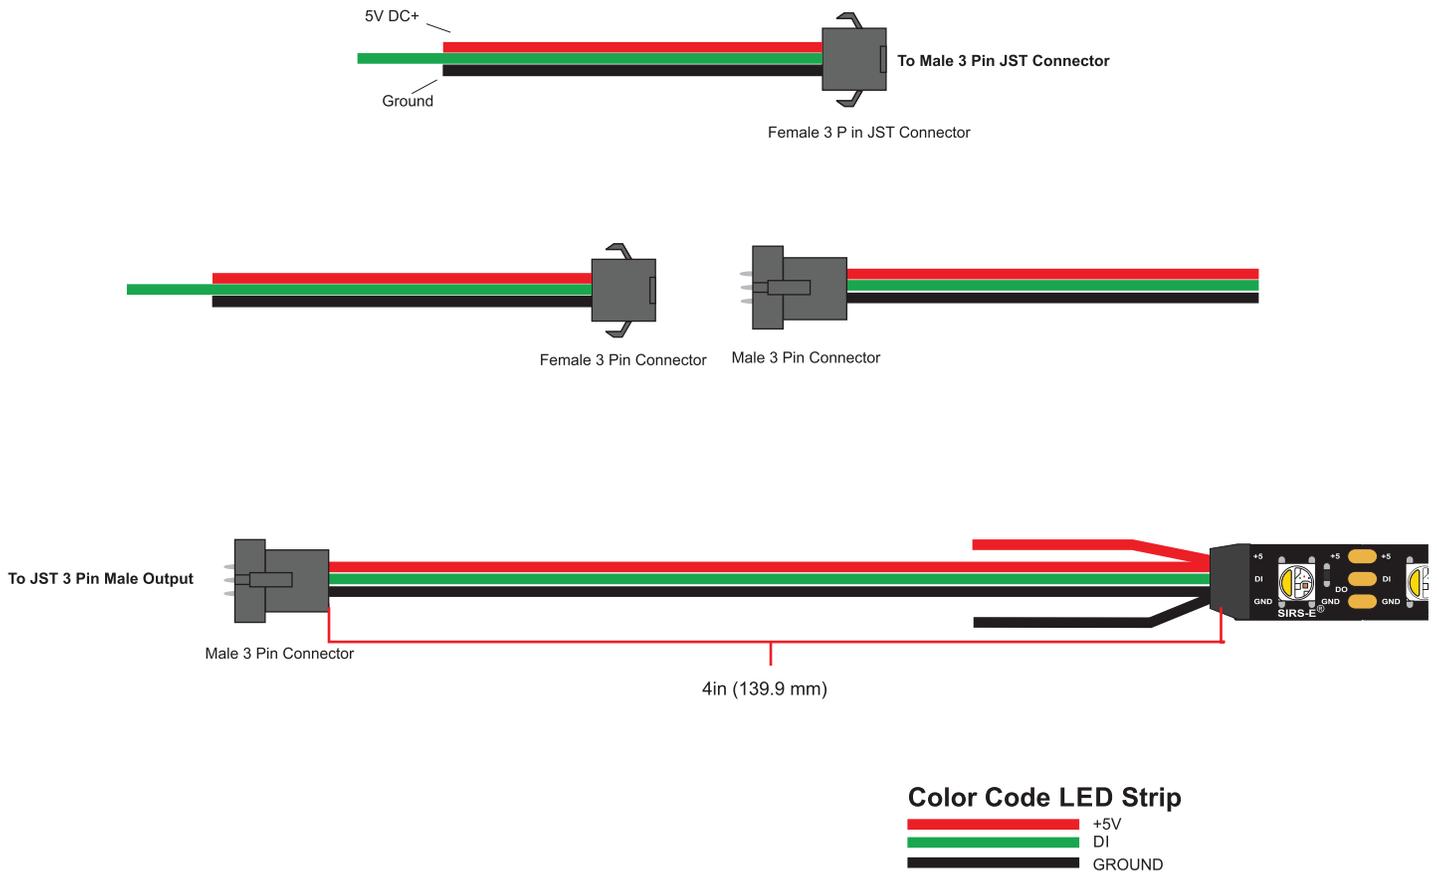

Mechanical Dimensions

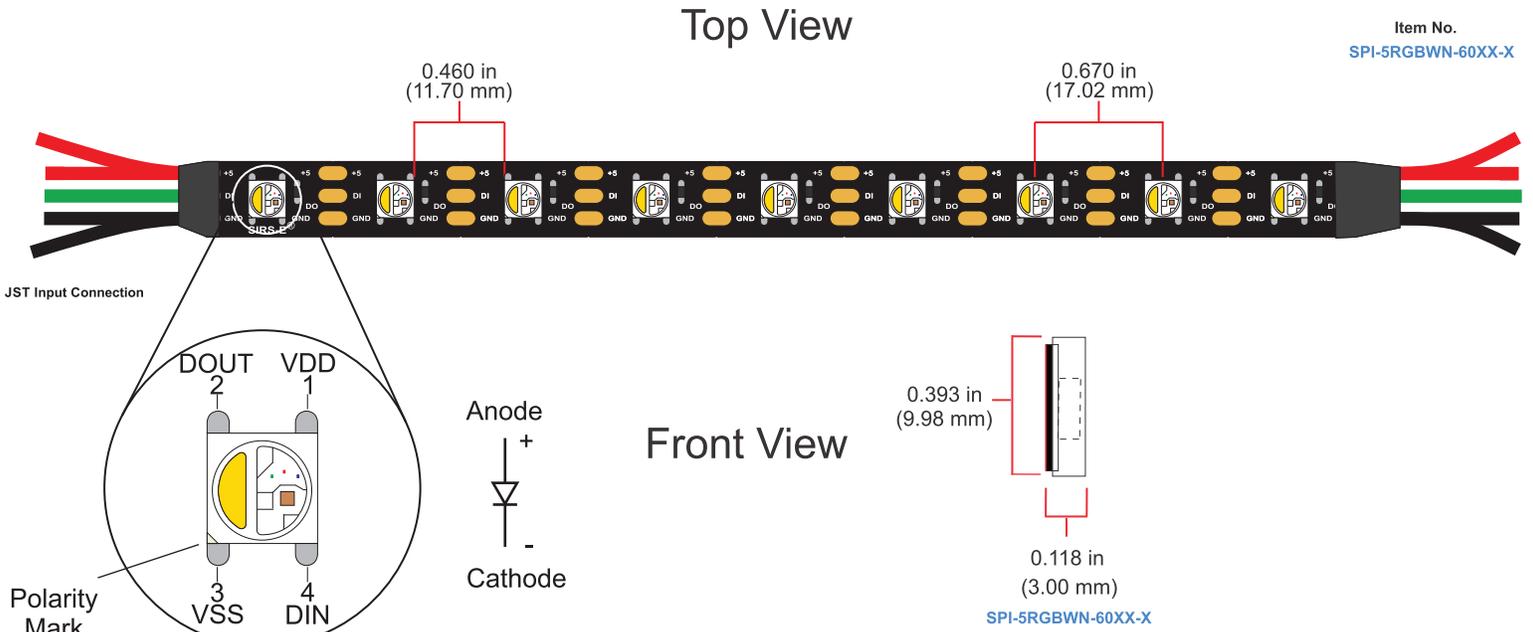

Cutable Segments

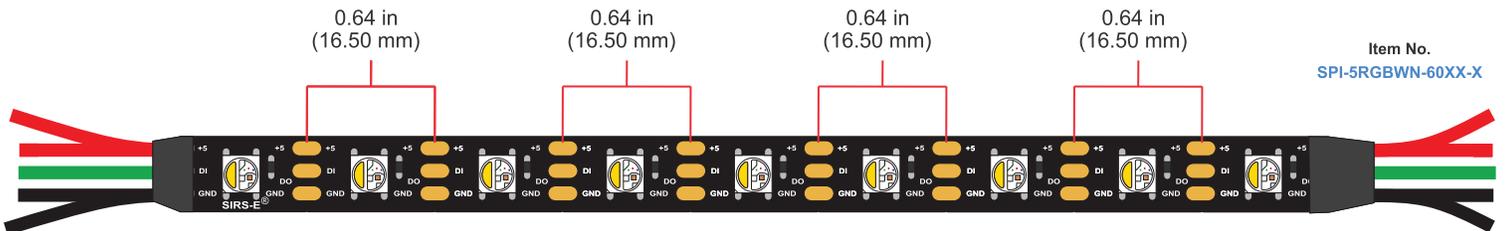

Note:

- Cutable at every pixel segment

Weight

Product Weight: 4.2 oz, 16.4 ft Reel (IP 40), Without Packaging.

Accessories Compatible

This list depicts some of our trusted accessories that are compatible for this product. For a complete list, please visit our website.



MADRIX Nebula Controller



MADRIX Compatible Software



DMX to SPI decoder




Meanwell 5V PSU 200W (LED-PS05V-200W-UL)



Meanwell 5V PSU 60W (LED-PS05-60W-UL)



SE Aluminum Extrusion

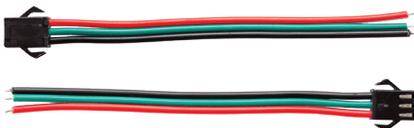

SIRS-E JST Wire Connectors



SIRS-E JST Wire Leads



Notes

A good technique to minimize brightness loss and increase lumen output on LED Strips is to power the strip on both sides. LED electrical and photometric characteristics change with the manufacturing batch/bin date. Approximately 3-Step MacAdam Ellipses between batches.
We reserve the right to change any data without prior notice.

About Us




SIRS-E[®] /semiconductor • illumination • research • solutions /

In 2004, SIRS-E[®] began research into the use of high powered LED components to be applied in direct lighting fixtures and LED strips.

In 2005, SIRS-E[®] developed the RGB HPL01 – 12 watt (60 lumens per watt efficiency) RGB lighting fixture controlled via DMX using LumiLEDS, one of the first high powered LEDs eventually acquired by Phillips. Included in early research solutions, was the development and testing of many different LED strips intended to be used for direct RGB lighting and effects applications.
This was the beginning of what we now know as SIRS – Electronics[®].

DATA CONNECTION TO SOFTWARE

POWER CONNECTION (MAY VARY)

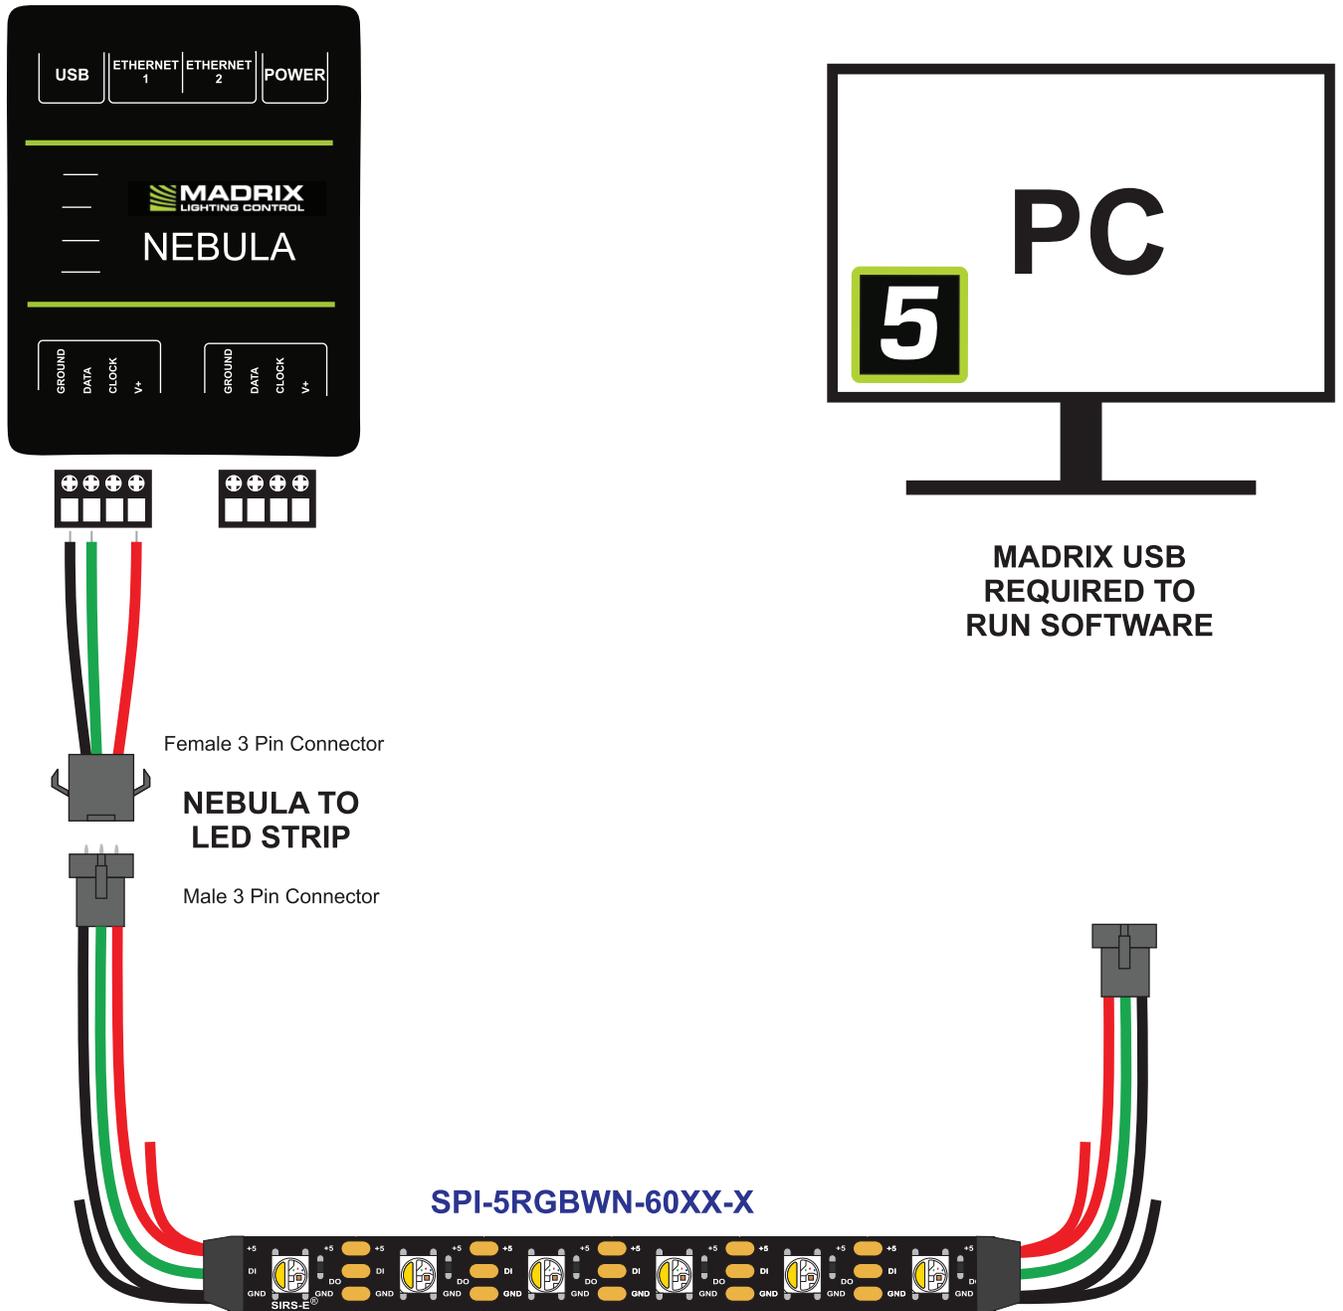


OPTION 1

WIRING OPTIONS ARE NOT LIMITED TO THE ONES DEPICTED IN THIS DIAGRAM. FOR A FULL LIST OF OPTIONS PLEASE VISIT MADRIX NEBULA QUICK START GUIDE

DATA CONNECTION TO SOFTWARE

POWER CONNECTION (MAY VARY)

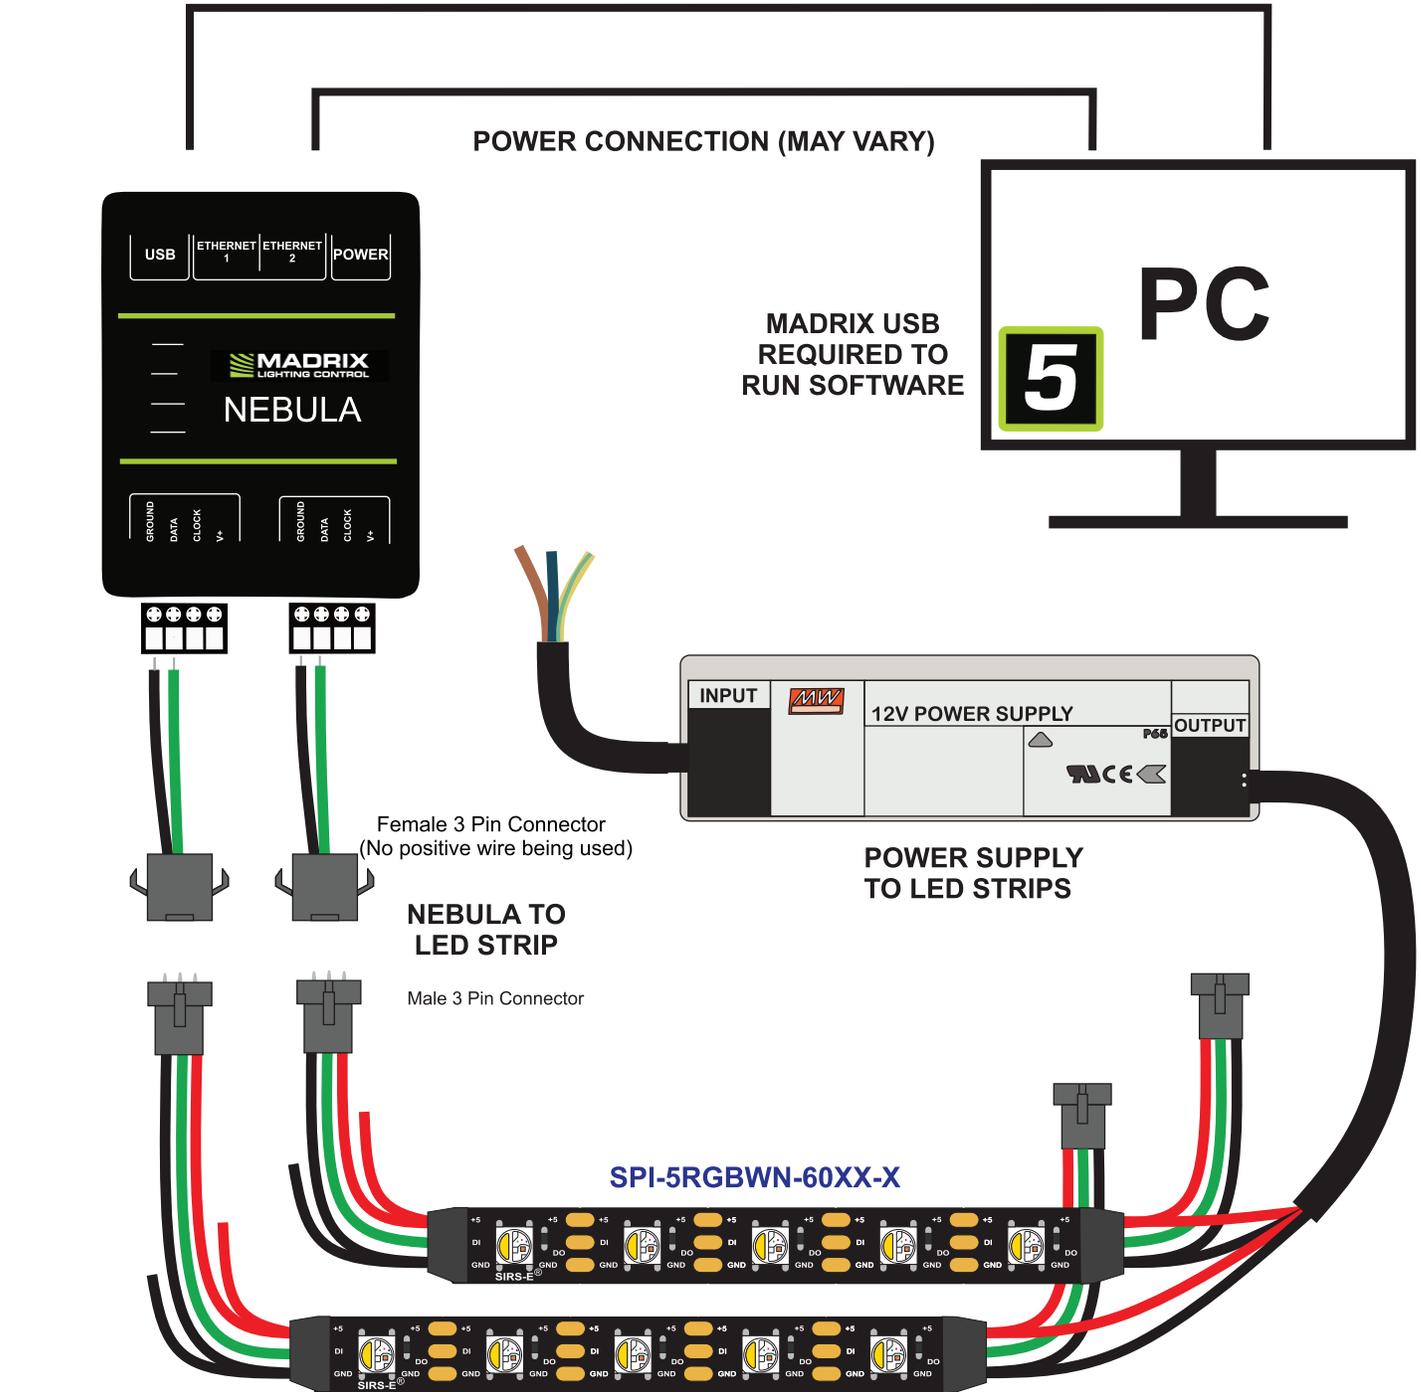

OPTION 2

WIRING OPTIONS ARE NOT LIMITED TO THE ONES DEPICTED IN THIS DIAGRAM. FOR A FULL LIST OF OPTIONS PLEASE VISIT MADRIX [NEBULA QUICK START GUIDE](#)