

Item No. 5050-24RGB-6040  
LED RGB Strip 5050 SMD RGB 5m 16.4ft | Double Density 60 LED/m IP40

### LED INFO

LED Density	18 /ft   60 /m
LED Count (Total)	300 Per Reel
LED Type	High Quality Selected 5050 SMD RGB
LED Ambience Operating Temperature	-20°F to 120°F
LED Storage Temperature	-13°F to 140°F

### POWER\*

Working Voltage / Input Voltage / Voltage Forward	24V DC
Power Consumption (Watts) Max.	4.01W /ft   13.16W /m   65.81W /5m Reel
Current Draw / Input Current / Current Max.	2742mA   2.742A   per 5m Reel
Power Drop Along the Strip (V+ In One Side) Approx.	1m = 5%   5m = 12%
Power Drop with V+ In on Both Sides Approx.	1m = 2%   5m = 4%

### PHOTOMETRY

Light Color	RGB - Red, Green, Blue
Peak Wave Length (nm) Approx.	R: 625nm   G: 524nm   B: 471nm
Brightness (Lumen) Tested in all colors at full intensity	270lm/ft   884lm/m   4422lm/Reel (Approx.)
Beam Angle	120°
UV/IR Emission	None
Lifespan / Average Lifetime / Lumen Maintenance	50,000 - 75,000 Hours (50% Brightness Loss)

### DIMENSIONS

Reel Total Length	16.4ft   5m
LED Spacing Between Centers (Inches   Millimeters)	0.66in   16.75mm
LED Spacing Between Edges (Inches   Millimeters)	0.45in   11.35mm
Minimum Cuttable Segments (Inches   Millimeters)	3.94in   100mm (Every 6 LEDs)
Width (Inches   Millimeters)	0.39in   10mm
Height (Inches   Millimeters)	0.08in   2.05mm
Cable Leads (Inches   Millimeters)	12in   304.8mm

### LED STRIP INFORMATION


LED Strip IP Rating	Non Waterproof IP40
LED Strip Adhesive	High Quality 3M Adhesive
LED Strip Finish Color / Product Color	White
LED Strip Net Weight (Without Packaging Material)	4.2 oz   119.1 g
LED Strip Warranty	3 Years Limited
UL Certification	UL Listed; UL 2108; E479339

Item No. 5050-24RGB-6040 (Continued)	
LED RGB Strip 5050 SMD RGB 5m 16.4ft   Double Density 60 LED/m IP40	
<b>PRODUCT COUNTRY OF ORIGIN</b>	
QC Quality Control	USA
Product Engineering & Design	USA
Assembled	China Preassembly / USA Final Assembly
Technical Support	USA
Product Customization	USA
<b>INSTALLATION MATERIALS &amp; ASSOCIATED PRODUCTS</b>	
Dimming and Color Mixing Options	DMX, Radio Frequency (RF), Infrared (IR), & Analog
Max Length in One Run for Linear Lighting	Unlimited Thru Amplifiers or DMX Controllers
Power Supply	Options Available
DMX Programming & Stand Alone	Options Available
LED RGB Strip Connectors	Options Available
4 Wire Installation Cables	Options Available
2 Wire Installation Cables	Options Available
Installation Accessories	Options Available
Installation Kits	Soldering Kit, Heatshrink Kit, Silicone Tube

**(\*) NOTES**

- The Strip Power Rating was measured with power input on both ends
- A good technique to minimize voltage drop and increase lumen output is to power the strip on both ends.
- LED electrical and optical characteristics change with the die manufacturing date.
- LED performance and life span is affected by environmental conditions, manufacturing techniques, and actual component characteristics.
- We reserve the right to change any data without prior notice.

Segment Close Up and Dimensions

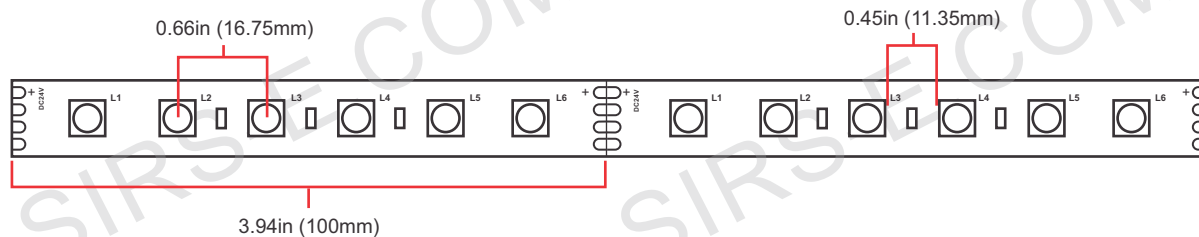

Item No.  
5050-24RGB-6040  
5050-24RGB-6067  
5050-24RGB-6068

**Front View**

