III SIRS-E®

	A STATE OF THE PARTY OF THE PAR
Pini	LED DMX Pixel by Pixel Vertical Tube 1.5 m DMX-TUBE-3232™
	C€ RoHS

Customer Name Project Name Part Number

Features

- Double sided effects for 360° viewing angles.
- Full dimming capability 0%-100%.
- Full RGB capability.
- Every LEDs is one RGB Pixel.
- Works with any type of DMX512 control.
- Colorful and vivid effects can easily be achieved.
- If set up in group, great 3D effects can be achieved.
- One year warranty.
- High quality clear plastic casing for optimum optics.

Product Specs

Model Number: DMX-TUBE-4848

Operating Voltage: DC 12V Max Current: 35W

Ambient Temperature: $-20^{\circ}\text{C} \sim 50^{\circ}\text{C}$

IP Rating: IP65

LED Type: SMD RGB 5050
Total LEDs: 96 (48 on each side)

Total Pixels: 48 Total DMX Channel: 144 Tubes per Universe: 3

DMXAddressability: Manual Addressing with external device (DMX-TUBE-PROG)

Viewing Angle: 360

Housing Materia: Clear Polycarbonate Plastic

Weight: 500g

Dimensions: 1552.5 mm x 35.25 mm x 35.25 mm


61.12 in x 1.39 in x 1.39 in

Physical Layout

35.25 mm (1.39 in)

PAGE 1-2 V2020021;



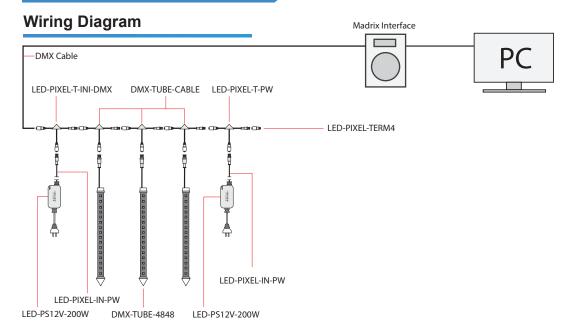


NOTE: You can repeat this setup up to 3 tubes per Universe.



NOTES

- The DMX-TUBE-4848 works by connecting a series of them in a, daisy chain.
- They are manually addressed using an external addressing device (DMX-TUBE-PROG).
- The initial DMX signal is acquired by connecting one initial T cable (part number: LED-PIXEL-T-INI-DMX) which provides the main DMX signal input as well as the main 12V DC power input.
- After the initial T Cable, the subsequent cables needed to daisy chain the vert tubes are the LED-PIXEL-T-PW which do not have the DMX connector.
- It is always best to power each 3 tube line that you may have created using the vert tubes from both sides of the line using 2 power supplies (12V 200W each), this will decrease voltage drop and keep everything evenly lit.
- You can have up to 3 Vert Tubes per universe.
- After the first 3 tubes, a new universe will need to be created.



PAGE 2-2 V2020021

Female XI R 3 Pin Connecto