


The SIRS-E® **SPI Digital (SD)** Led Strip Series utilizes integrated IC technology per LED to communicate and reproduce millions of colors. Create captivating effects that are limited only by the imagination of the user.



The slim 10mm profile allows it to fit into various mounting channels for multiple lighting applications. Easily mountable utilizing 3M VHB Aero-Grade tape, engineered to dissipate heat.

The **SPI** series provides amazing results for all kinds of entertainment applications such as commercial, residential, productions, shows, and many more.

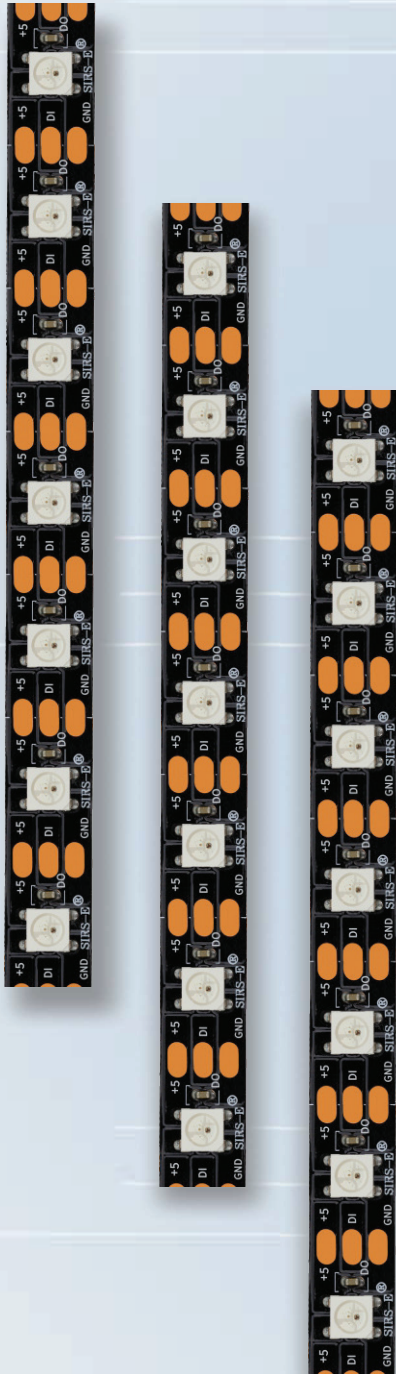

- **Digital RGB LED Strip**
- Cuttable every pixel (**16.5mm**) allowing for precise designs.
- **1 Pixel 1 LED**
- Improved Digital LED density **60 LEDs/m**
- Smooth transition dimming curves
- Higher refresh rate for cinematography.
- Pixel Mapping Order- GRB
- Black PCB Board.
- White PCB Board (**Special Order**)
- IP 40 - Indoor, Dry / IP 68 - Damp, Wet
- **5V DC Input Voltage**

Delivering superior strip lighting with a proven record spanning more than a decade without electrical, chromatic, LED or color rendering issues. SIRS-E® continues to lead the market place in stability, reliability, and efficiency of LED lighting and lighting control systems.