

Customer Name

Project Name

Part Number


Flexible RGBW LED Strip



Description

RGBW LED strip lights let you create billions of colors by just mixing red, green, and blue colors with a 4th color diode. Our new AcuHue™ series of CV RGBW strips include a 4oz density PCB that minimizes voltage drop and a 3M VHB adhesive tape for a more secure installation. AcuHue™ RGBW LED strips are offered in many variations such as 12V and 24V and varying IP ratings such as IP40 (indoor, dry locations) or IP68 (damp, wet locations). These strips are free of UV radiation, fully dimmable, and DMX addressable using our SIRS-E® line of DMX-CON decoders.

Product Specifications

Input Voltage	12 V DC / 24 V DC ²	Cuttable Segments	1.6 in (42 mm) for 12V / 3.3 in (83 mm) for 24V
Limiting Control Method	CV - Constant Voltage	Reel Length	16.4 ft / 5 m
Power Consumption	6.62 W/ft	Max Run Length	5 meters, 10% luminous flux loss
LED Chip Type	High Quality SMD 5050 4-Diode	Segment Width	0.47 in (12 mm) for IP40 / 0.56 in (14 mm) for IP68
LED Density	22 LEDs/ft / 72 LEDs/m	Luminous Flux Maintenance	75,000 hrs ³
Board Type/Color	4 oz Density Copper, White PCB	Dimming	DMX PWM, RF PWM, 0-10V, MLV, Incandescent
Beam Angle	120°	Environmental	IP 40 - Indoor, Dry / IP 68 - Damp, Wet
Operating Temperature	-20°F to 120°F	Warranty	5 Years Limited
Mounting	Non-Porous: 3M VHB Adhesive Mounting Tape	Certifications	 UL Listed, E479339

Product Photometrics - Red, Green and Blue Diodes

Color Diode	Peak Wavelength (nm)	Dominant Wavelength (nm)	CIE (x,y)	Luminous Flux (lm/ft)	Luminous Efficacy (lm/W)
Red	632.0	621.5	(0.6936, 0.3054)	59	29.3
Green	516.6	521.9	(0.1429, 0.7237)	160	86.2
Blue	462.2	466.4	(0.1379, 0.0515)	34	17.0

Product Photometrics - White Diode Only

Nominal CCT (K)	Luminous Flux (lm/ft)	Luminous Efficacy (lm/W)	CIE (x,y)	Duv ₁	CRI	TM-30-15	
						Fidelity (Rf)	Gamut (Rg)
4000 K	172	89.1	(0.4637, 0.4159)	+0.0012	82.3	84.3	93.7

Product Photometrics - All Four Colors at Full Intensity

Nominal CCT (K)	Luminous Flux (lm/ft)	Luminous Efficacy (lm/W)	CIE (x,y)	Duv ₁	CRI	TM-30-15	
						Fidelity (Rf)	Gamut (Rg)
11075 K	414	53.9	(0.2874, 0.2807)	-0.0094	65.6	NA	NA

1 - Duv Chromaticity Consistency is throughout the run length. Typically below 1-step MacAdam Ellipse.

2 - AcuHue™ 24V RGBW LED Strips are Special Order only.

3 - After 75,000 hrs: 30% Luminous Flux loss, 10% Chromaticity change, as per LM-80-15

Ordering Guide

Series	Voltage	Control	CCT / λ ^{2 3 *}	IP	Run Length
AcuHue™	XX	CV	40	XX	16
	12	CV	27	40	
	24 ¹	CC	55	68	
			590		

¹ Voltage - AcuHue™ 24V RGBW LED Strips are Special Order only.

² CCT - Correlated Color Temperature, represented by the first 2 digits of the nominal CCT.


³ λ - Peak Wavelength, represented by the 3 digits of the color wavelength.

* CCT / λ - applicable on AcuVivid and AcuHue series only.

Product Country of Origin

Product Engineering & Design	USA
Assembled	China Preassembled / USA Final Assembly
QC Quality Control	USA
Product Customization	USA
Technical Support	USA

Mechanical Dimensions

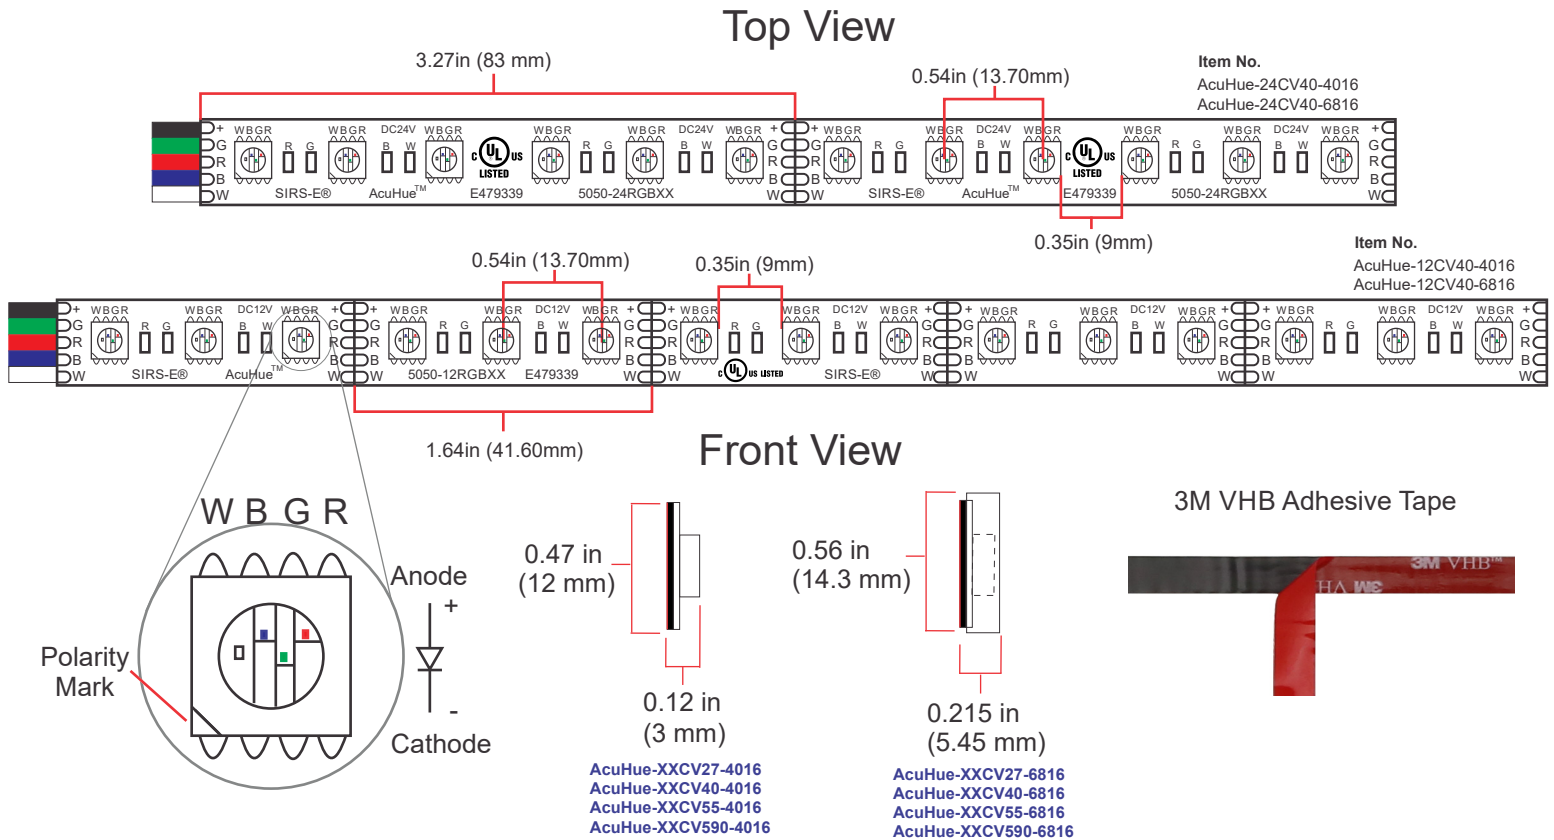

Weight

Product Weight:	5.3 oz, 16.4 ft Reel IP40, Without Packaging.
	18.4 oz, 16.4 ft Reel IP68, Without Packaging.

Notes

- A good technique to minimize brightness loss and increase lumen output on CV LED Strips is to power the strip on both sides.
- LED electrical and photometric characteristics change with the manufacturing batch/bin date. Approximately 3-Step MacAdam Ellipses between batches.
- We reserve the right to change any data without prior notice.

Accessories Compatible

This list shows some of our most sellable accessories compatible for this product. For a complete list, please visit our website.



SIRS-E DMC Controllers
DMX-CON4V2-C2




SIRS-E RF Controllers
RF-MZRX-RGBW



SIRS-E DMX Controllers
DMX-CON4-C2



SIRS-E Waterproof
Accessories

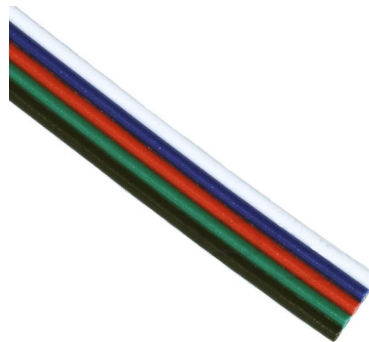

SIRS-E RGBW Wire Leads



About Us



SIRS-E /semiconductor • illumination • research • solutions /

In 2004, SIRS-E began research into the use of high powered LED components to be applied in direct lighting fixtures and LED strips.

In 2005, SIRS-E developed the RGB HPL01 – 12 watt (60 lumens per watt efficiency) RGB lighting fixture controlled via DMX using LumiLEDs, one of the first high powered LEDs eventually acquired by Phillips. Included in early research solutions, was the development and testing of many different LED strips intended to be used for direct RGB lighting and effects applications.

This was the beginning of what we now know as SIRS – Electronics.