ProDMX-CAB

4 Conductors 22 AWG Shielded DMX Cable

The SIRS-E® **ProDMX-CAB** DMX512 Cable 2 Pair (4 Conductors + Shield), is a thin 0.169" Shielded cable utilized for lighting control. This 22-AWG stranded bare-copper-conductor cable provides the ideal conductivity needed for DMX512 transmission. Made in the USA with high-quality materials, this is the cable that you can trust for your DMX applications. This product is available in 2 versions; Plenum UL Listed and Waterproof IP65.

0.169"
Outside Diameter
Waterproof IP65

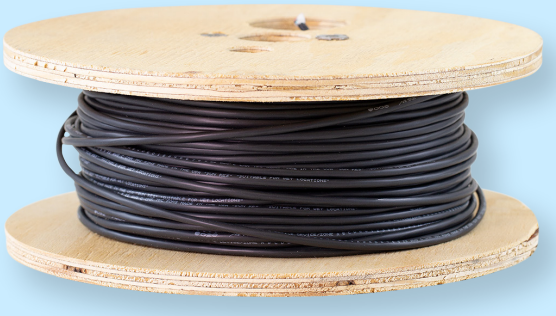

Applications

- DMX512 Lighting Control
- Temporary or Permanent Installations
- Stage Applications

Technical Specifications

- 120 Ohms Nominal Impedance
- 4 Conductors, 22 AWG 7 Strands
- 1 Drain Wire, 24 AWG 7 Strands
- Bare Copper
- 0.145" (UL) and 0.169" (IP65) Outside Diameter
- Aluminum Mylar Foil Shielding
- Black PVC Jacket Multi-Conductor
- Non-Polyester Woven Water Blocking Tape for Waterproofing

Main Features

- DMX512 and AES/EBU Digital Cable
- Waterproof IP65
- Plenum UL Listed
- Low-Capacitance Data Pairs
- Drain Wire for Easy Shield Termination
- Ultra-Thin overall diameter
- For use with 3 or 5 Pin XLR Connectors
- Sun Resistance and Suitable for Wet Locations
- Made in the USA

0.145"
Outside Diameter
Plenum UL Listed

c UL us
LISTED

Available Versions

- Waterproof IP65 - DMX-4CSNP-2265
- Plenum UL Listed - DMX-4CSP-2260-UL (Special Order)
- Per Foot
- Spool

For more information, please download the datasheet pdf or contact SIRS-E Technical Support.

Delivering superior LED strip lighting with a proven record spanning more than a decade without electrical, chromatic, or color rendering issues. SIRS-E® continues to lead the marketplace in the stability, reliability, and efficiency of LED lighting and lighting control systems.

V110922
DOCUMENT TYPE: BROCHURE

3307 West Street Rosenberg, TX 77471 USA - (281) 324-0908

Copyright © 2006-2022 SIRS Electronics Inc. All Rights Reserved.