

VersaDrive (288W)

Installation Guide

For Models:
VADT288L24DCOD

Quick Specs

Input Voltage	120-277VAC
Output Voltage	24VDC
Max. Ambient Temp.	-40°C to +50°C (-40°F to +122°F)
Enclosure	Nema 3R (Outdoor Use)
Min. installation space between drivers	5"

! BEFORE YOU BEGIN

General

This driver is to be installed in accordance with Article 450 of the National Electric Code (NEC). The driver must be installed in a well-ventilated area, free from explosive gases and vapors. Proper operation requires for free flow of air. Since this driver is hardwired, it should only be installed by a qualified electrician.

Precautions Before Installation

Check the label and ensure the driver has the proper input voltage and wattage for the job. Check the wire markings to ensure they match the wiring diagram on page 2.

Mounting

Select a suitable location capable of supporting the weight of the driver. Mount the unit using the four (4) keyholes in the driver case. Keep a minimum space of 5" between each driver.

Input Connections/Grounding

Remove the wiring cover and install the clamp connectors. With power turned off, route the input wires through the opening of a removed knockout on the front or side of the driver using a wire strain relief. Make connections according to the wiring diagram on page 2. For all wire connections, use the supplied Wago wire connectors. The driver **MUST** be grounded in accordance with the NEC. Driver input wires colors are Line (black), Neutral (white) and Ground (green).

Dimming (5-Way)

Dimmable with forward phase (MLV), reverse phase (ELV), 0-10V, PWM, and potentiometer style dimmers.

Output Connections


Bring the wires of each fixture through the opening of a removed knockout on the front or side of the driver using a wire strain relief. Connect the positive (+) and negative (-) wires of the fixture to the desired channels positive (red) and negative (blue) output of the driver using the included Wago connectors according to the following wiring diagram. Do not exceed the maximum wattage (96 watts) per channel. There is a 20 watt minimum per channel. **DO NOT** merge all channels.

For dimmer compatibility information, scan the QR Code below using your cell phone's camera app.



↓ WIRING DIAGRAMS ↓


↓ Phase-Cut Dimmable Configuration ↓

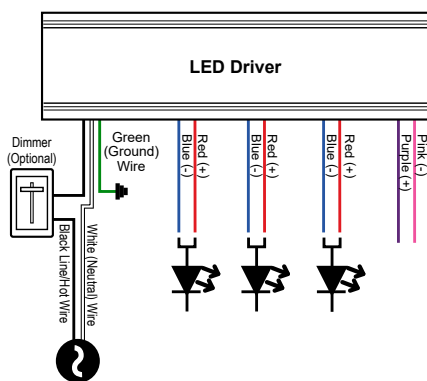

Notes: Pink & purple wires are not used for this configuration.


Different loads may be used on each channel, subject to minimum/maximum in specifications. Unused channels are okay. Do not merge all channels.

↓ 0-10V Dimmable Configuration ↓

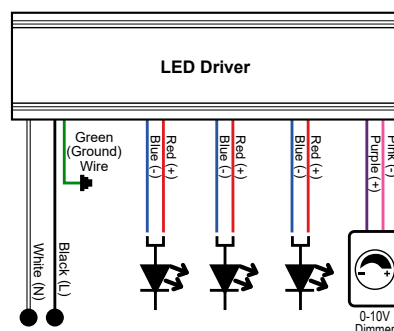

Note: Different loads may be used on each channel, subject to minimum/maximum in specifications. Unused channels are okay. Do not merge all channels.

↓ Potentiometer Dimmable Configuration ↓

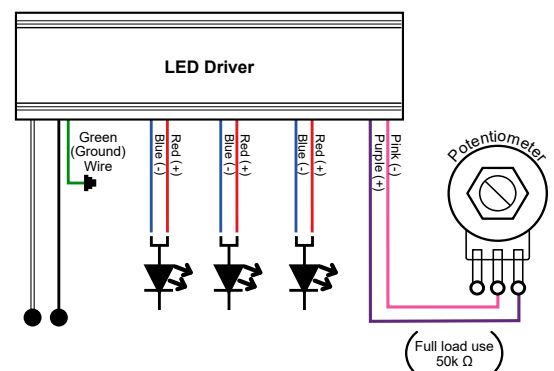

Note: Different loads may be used on each channel, subject to minimum/maximum in specifications. Unused channels are okay. Do not merge all channels.