

LED RGBW Controller for all RGBW Strips



Features

- A total of 15 available sequences to choose from, 12 color rotating sequences and 3 static colors.
- Wireless RF control, up to 30 meters in line of sight range.
- User friendly set up and control
- Compatible with **LED-AMP-12V-RGBW** for unlimited amplification.

Product Specs

Model: LED-CON-RF-RGBW

Operating Voltage: DC 12V~24 V

Max Current per Channel: 6A @12VDC, 3A @ 24VDC

Ambient Temperature: -20°C – 60°C




Net Weight: 45 grams

IP Rating: IP60 (Non-waterproof, keep dry at all times)

Sequence Chart

Number	Mode	Brightness state	Speed state	Remark
1	Static color	Adjustable	Adjustable	Choose any color by touching the color ring
2	Static white color	Adjustable	Adjustable	White only
3	Color/White static coexist	Adjustable	Adjustable	Color ring free to choose, Brightness adjusts only for color light
4	All colors gradual change	Adjustable	Adjustable	White (off)
5	Four colors gradual change	Adjustable	Adjustable	
6	Four colors jump to change	Adjustable	Adjustable	
7	Seven color jump to change (with white color)	Adjustable	Adjustable	
8	Red/White jumps to change	Adjustable	Adjustable	
9	Blue/White jumps to change	Adjustable	Adjustable	
10	Green/White jumps to change	Adjustable	Adjustable	
11	Red jumps to change	Adjustable	Adjustable	
12	Blue jumps to change	Adjustable	Adjustable	
13	Green jumps to change	Adjustable	Adjustable	
14	White jumps to change	Adjustable	Adjustable	
15	Circulation mode	Adjustable	Adjustable	All the modes cycle

Remote Key

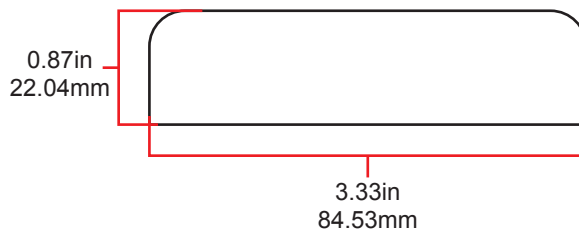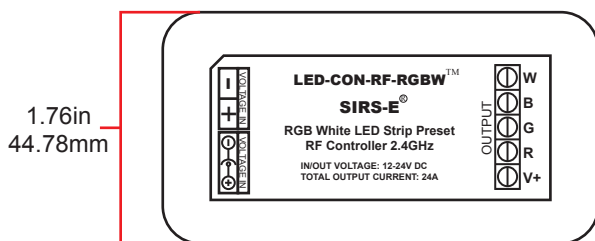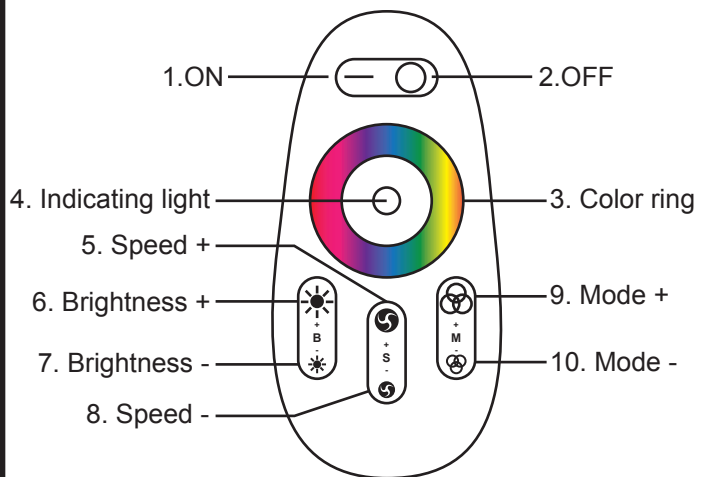

Last Revised 12/23/2014