

RF Remote Controller Transmitter for Single Color Multizone Receivers



Features

- Wireless RF control, up to 30m in line of sight range.
- Compatible with **RF-MZRX-1CH** Receiver Controller only
- Ability to control up to 4 zones per Transmitter Remote, and multiple Receiver RF Controllers.

Product Specs

Model: RF-MZTX-1CH

Operating Voltage: DC 3V (2 x AAA batteries - Not Included)

Ambient Temperature: -20°C - 60°C

Operating Frequency: 2.4 GHz

Net Weight: 47g (1.66oz)

RF Control Distance: 30m (98.4 ft) in line of sight

IP Rating: IP40 (Keep dry at all times)

Dimensions: 119.95 x 52.60 x 20.15 mm (4.72 x 2.07 x 0.79 in)

Material: High Quality ABS plastic

Programming Instructions

Programming Zones:



1. Choose which zone you want to assign the RX.
2. Switch OFF the main power supply in the selected zone, with the main switch or pull the AC plug.
3. Switch the power supply ON again, and within 3 seconds press and hold the desired Zone button ON.
4. When this program is successful, the LEDs will slowly blink 3 times.

Unprogramming Zones:

1. Choose which zone you want to unprogram from the RX.
2. Switch OFF the main power supply in the selected zone, with the main switch or pull the AC plug.
3. Switch the power supply ON again, and within 3 seconds pres and hold the desired Zone button ON.
4. When this unprogram is successful, the LEDs will slowly blink 10 times.

Physical Layout

Remote Key

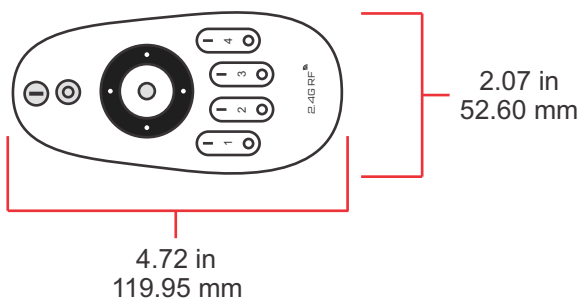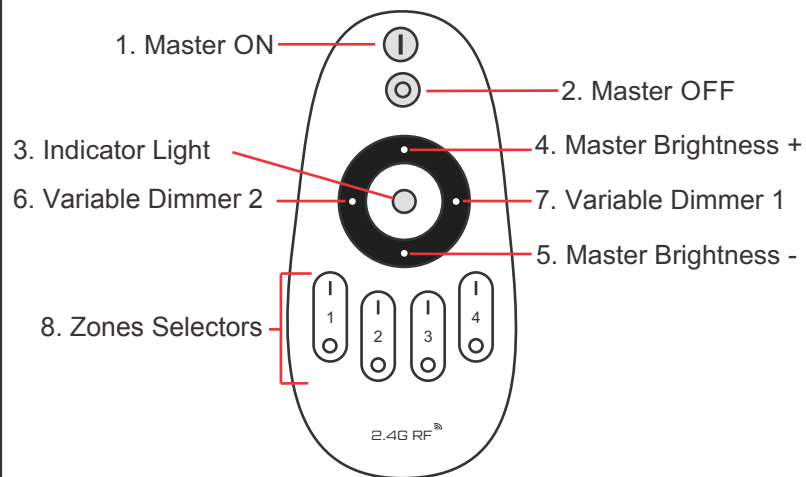

Last Revised on: 12/21/2016