

Item No. 5050-LED-CW-DD			
LED Cool White Strip 5050 SMD 5m 16.4ft Double Density 60LED/m IP40			
LED INFO ON LED STRIP			
LED Density	18 /ft 60 /m		
LED Count (Total)	300 Per Reel		
LED Type	High Quality Selected 5050 SMD		
LED Ambience Operating Temperature	-20°F to 120°F		
LED Storage Temperature	-13°F to 140°F		
POWER*			
Working Voltage / Input Voltage / Voltage Forward	12V DC		
Power Consumption (Watts) <i>Max.</i>	3.18W /ft	10.42W /m	52.08W /5m Reel
Current Draw / Input Current / Current <i>Max.</i>	4340mA	4.34A	per 5m Reel
Power Drop Along the Strip (Meter) <i>Approx.</i>	1m = 7%	5m = 17%	
Power Drop with <u>V+</u> <u>In</u> on Both Sides <i>Approx.</i>	1m = 5%	5m = 7%	
PHOTOMETRY			
Light Color	Cool White - 13,000°K		
Peak Wave Length (nm) <i>Approx.</i>	N/A		
Brightness (Lumen) <i>Tested at full intensity</i>	350lm/ft	1150lm/m	5749lm/Reel (Approx.)
Beam Angle	120°		
UV/IR Emission	None		
Lifespan / Average Lifetime / Lumen Maintenance	50,000 - 75,000 Hours (50% Brightness Loss)		
DIMENSIONS			
Reel Total Length	16.4ft	5m	
LED Spacing Between Centers (Inches Millimeters)	0.69in	17.50mm	
LED Spacing Between Edges (Inches Millimeters)	0.47in	12.00mm	
Minimum Cuttable Segments (Inches Millimeters)	1.96in	50mm	
Width (Inches Millimeters)	0.39in	10mm	
Height (Inches Millimeters)	0.08in	2.05mm	
Cable Leads (Inches Millimeters)	7in	178mm	
LED STRIP INFORMATION			
LED Strip IP Rating	Non Waterproof IP40		
LED Strip Adhesive	High Quality 3M Adhesive		
LED Strip Finish Color / Product Color	Copper		
LED Strip Net Weight (Without Packaging Material)	2.9 oz	82.21g	
LED Strip Warranty	3 Years Limited		
UL Certification	UL Listed; UL 2108; E479339		


Item No. 5050-LED-CW-DD (Continued)	
LED Cool White Strip 5050 SMD 5m 16.4ft Double Density 60LED/m IP40	
PRODUCT COUNTRY OF ORIGIN	
QC Quality Control	USA
Product Engineering & Design	USA
Assembled	China Preassembly / USA Final Assembly
Technical Support	USA
Product Customization	USA
INSTALLATION MATERIALS & ASSOCIATED PRODUCTS	
Dimming and Color Mixing Options	DMX, Radio Frequency (RF), Infrared (IR), & Analog
Max Length in One Run for Linear Lighting	Unlimited Thru Amplifiers or DMX Controllers
Power Supply	Options Available
DMX Programming & Stand Alone	Options Available
LED RGB Strip Connectors	Options Available
4 Wire Installation Cables	Options Available
2 Wire Installation Cables	Options Available
Installation Accessories	Options Available
Installation Kits	Soldering Kit, Heatshrink Kit, Silicone Tube

(*) NOTES


- The Strip Power Rating was measured with power input on both ends
- A good technique to minimize voltage drop and increase lumen output is to power the strip on both ends.
- LED electrical and optical characteristics change with the die manufacturing date.
- LED performance and life span is affected by environmental conditions, manufacturing techniques, and actual component characteristics.
- We reserve the right to change any data without prior notice.

Segment Close Up and Dimensions

Top View

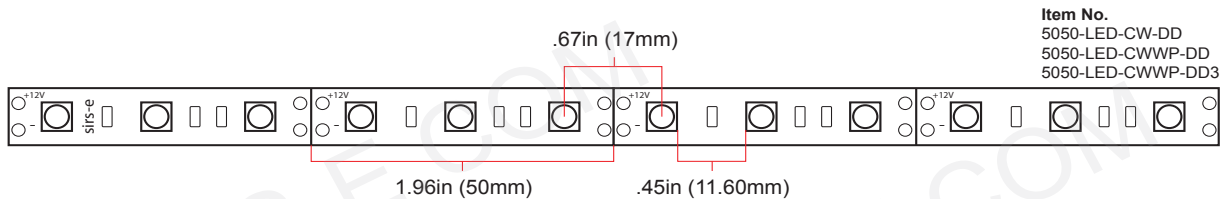

Front View

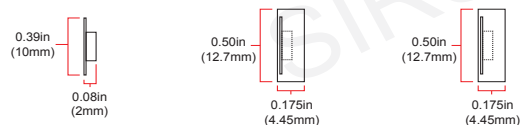

5050-LED-CW-DD 5050-LED-CWWP-DD 5050-LED-CWWP-DD3

